



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 737 055 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
19.08.1998 Bulletin 1998/34

(21) Application number: 95905284.6

(22) Date of filing: 27.12.1994

(51) Int. Cl.⁶: **A61F 13/15**

(86) International application number:
PCT/SE94/01258

(87) International publication number:
WO 95/17869 (06.07.1995 Gazette 1995/29)

(54) **ABSORBENT BODY IN AN ABSORBENT PRODUCT**

ABSORBIERENDER KÖRPER IN EINEM ABSORBIERENDEN PRODUKT

CORPS ABSORBANT INTEGRE DANS UN ARTICLE ABSORBANT

(84) Designated Contracting States:
AT BE CH DE DK ES FR GR IE IT LI NL PT SE

(30) Priority: 29.12.1993 SE 9304320

(43) Date of publication of application:
16.10.1996 Bulletin 1996/42

(73) Proprietor: SCA Mölnlycke AB
405 03 Göteborg (SE)

(72) Inventors:
• GUIDOTTI, Ted
S-412 67 Gothenburg (SE)

• STEGER, Christina
S-431 49 Mölndal (SE)
• WIDLUND, Urban
S-435 43 Mölnlycke (SE)
• ÖSTERDAHL, Eje
S-426 58 Västra Frölunda (SE)

(74) Representative: Larsson, Karin
Albihns Patentbyrå Stockholm AB
P.O.Box 3137
103 62 Stockholm (SE)

(56) References cited:
EP-A- 0 354 196 EP-A- 0 536 941
US-A- 4 501 586

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 737 055 B1

Description

Technical area

The present invention relates to an absorbent body in an absorbent product, such as a diaper, incontinence pad, sanitary napkin or the like, said absorbent body comprising a liquid acquisition portion and a liquid storage portion adjacent thereto, a first absorbent structure, which has a first effective mean pore size, being arranged in the liquid storage portion, and one or more second absorbent structures, each one having a larger effective mean pore size than the first mean pore size, being arranged in the liquid acquisition portion.

The background of the invention

An absorbent body for absorbent products such as disposable diapers, incontinence protectors and sanitary napkins is usually constructed of one or more layers of hydrophilic fibres, e.g. cellulose fluff. Furthermore, so-called superabsorbents are often included, which are polymers with the capacity to absorb many times their own weight in water or bodily fluid. Furthermore, additional components can sometimes be included in the absorbent body in order to improve, for example, its fluid spreading properties or to increase its coherence and ability to resist deformation during use.

A major problem, primarily in adult diapers and incontinence protectors intended to receive and absorb relatively large quantities of fluid, is that they often leak before their total absorbent capacity is completely used up. Since during urination, large quantities of fluid are often expelled during a few seconds, it is not uncommon that this results in the absorbent body being temporarily locally saturated with urine in the so-called fluid acquisition zone, when there is not enough time for the urine to be spread out to the other portions of the absorbent body and thus any more urine expelled will leak out of the diaper. Such early leakage is, of course, a great source of irritation for both the user and his caretaker. The leakage problem is accentuated upon repeated wetting.

Another problem is keeping the surface facing the user as dry as possible during the entire use and preventing so-called re-wetting, i.e. that already absorbed fluid is pressed back out of the absorbent body and wets the skin of the user or gives rise to leakage. To a certain extent, these re-wetting problems are alleviated if the absorbent body contains superabsorbents, which chemically bond the absorbed fluid even when the product has been subjected to external pressure, for example when the user sits down. One difficulty is, however, to design the absorbent body in such a way that the fluid is spread from the wetting area to unused portions of the absorbent body.

International patent application WO-A-9315702

describes an absorbent body comprising at least two different cellulose fluffs, the fibre structure in the first absorbent layer substantially consisting of a first type of fluff with an open fibre structure and low liquid dispersability, for example a cellulose fluff made chemo-thermo-mechanically, and a fibre structure in the other absorbent layer essentially consisting of a second type of fluff with higher liquid dispersability than the fluff in the first absorbent layer, for example a chemically produced fluff. The first layer can, by virtue of its open fibre structure, house much liquid between the fibres and therefore can receive large amounts of liquid during a short period of time, i.e. it has a high momentaneous liquid absorption capacity. The other layer, which has a higher liquid dispersability than the first layer, is able to drain liquid from the first layer and spread it to the other layer.

EP-A-0,254,476 discloses an absorbent body, which in one zone essentially in front of the wetting area, has a lower surface weight and a lower density than the surrounding portions of the absorbent body. This provides an area with high momentaneous liquid absorption capacity, whereafter the liquid can be dispersed and stored in the surrounding areas of the absorbent body.

GB-A-2,082,643 describes an absorbent body with an essential uniform surface weight but with a density gradient in the longitudinal direction, so that the density increases towards the short sides of the absorbent body. This provides rapid liquid admittance in the central portion of the absorbent body out towards the more compressed end portions.

US-A-4,413,996 describes an absorbent body for a diaper having a liquid absorbing depression or well in the wetting area. In this well, a porous batt can possibly be arranged.

EP-A-0 354 196 discloses an absorbent body comprising two separate material layers where the inner layer intended to lie nearest the wearer's body has a lower density and larger capillaries than the outer layer. Liquid received by the inner layer will be swiftly absorbed by the larger capillaries. The smaller capillaries in the outer layer will thereafter by capillary action draw the liquid from the inner layer.

There is, however, still room for improvement as regards liquid absorption capacity and dispersability, especially in products intended to be able to receive large quantities of liquid during a short period of time, which is often the case in, for example, incontinence products for adults. Another goal is that the surface of the absorbent body facing the user must be felt to be dry and comfortable, even after repeated wetting.

The purpose and essential features of the invention

The purpose of the present invention is to provide an absorbent body of the type described by way of introduction, which fulfills the goals, i.e. which can rapidly receive large quantities of liquid by wicking even upon

repeated wetting, and disperse the liquid by wicking towards the unused portions of the absorbent body, and which also has a high surface dryness. This has been achieved by an absorbent body comprising a liquid acquisition portion and a liquid storage portion adjacent thereto, a first absorbent structure, which has a first effective mean pore size, being arranged in the liquid storage portion, and one or more second absorbent structures, each one having a larger effective mean pore size than the first mean pore size, being arranged in the liquid acquisition portion, wherein said liquid acquisition portion comprises at least one well located at the assumed wetting area of the absorbent body, said well extending depth-wise into the underlying liquid storage portion, as well as a cover layer which covers at least substantial portions of the liquid storage portion, said one or more second absorbent structures being arranged in said well(s) and said cover layer.

Description of drawings

Fig. 1 shows a plan view of a diaper as seen from the side facing the user.

Fig. 2 shows a plan view of an absorbent body in the diaper according to Fig. 1.

Fig. 3 is a section along the line III-III in Fig. 2.

Figs. 4 and 5 are corresponding sections but through alternative embodiments of the absorbent body.

Fig. 6 shows a plan view of another absorbent body.

Fig. 7 is a section along the line VII-VII in Fig. 6.

Fig. 8 shows a plan view of still another absorbent body.

Fig. 9 is a section along line IX-IX in Fig. 8.

Fig. 10 shows in the form of a stack diagram the momentaneous absorption of an absorbent body (B) according to the invention and another absorbent body (A).

Description of examples

The diaper shown in Fig. 1 comprises a liquid permeable cover layer 1, for example of fibre fabric or perforated plastic film, a liquid impermeable cover layer 2, for example of plastic film or hydrophobic fibre fabric, and an absorbent body 3 enclosed between the two cover layers 1 and 2.

The diaper is intended to enclose the lower portion of the user's torso as a pair of absorbent pants. It has a rear portion 4 intended to face the rear of the user, a front portion intended to face the front of the user, and a narrower crotch portion 6 between the back portion 4 and the front portion 5. In order to be able to join the diaper together to the desired pant shape, tape tabs 7 are arranged adjacent the rear waist edge 8 of the diaper. The tape tabs 7 are fixed when used against the exterior of the front portion 5 of the diaper, close to the front waist edge 9, thus holding the diaper together about the

waist of the user. Other fastening means, such as Velcro®, hooks and the like are of course also conceivable.

Furthermore, the diaper according to Fig. 1 comprises pretensioned elastic means 10, which can consist of a suitable material, such as elastic foam, elastic tape or thread-wound elastic cords. For the sake of simplicity, the cords are shown in Fig. 1 in their extended state. As soon as the tension is released, the elastic means will contract and thereby form the elastic leg bands of the diaper.

It should be pointed out here that the diaper shown in the drawing and described above is in no way a limiting example. Thus, the shape of the diaper as well as its other design features can be varied. For example, for diapers intended to be worn inside a special pair of fixing pants, the fastening means, i.e. the tape tabs 7, can be eliminated as can possibly the elastic means 10 as well.

With reference to the example shown in Fig. 3, the absorbent body 3 of the diaper is composed of a number of different parts. Essentially directly in front of the assumed wetting area of the diaper, which is the area of the diaper which is first struck by the emitted urine, and which is usually displaced somewhat towards the front portion of the diaper, the absorbent body 3 has a liquid acquisition well 13 which extends into and straight through a surrounding liquid storage layer 12. The well 13 can rapidly receive great amounts of liquid during a short period of time. Beneath the storage layer 12 and the well 13, there is a wicking layer 14 consisting of a fibre material with high liquid dispersability.

The fibre material in the well 13 can consist, for example, of cellulose fibres of mechanical pulp, thermo-mechanical pulp, or chemi-thermo-mechanical pulp, so-called CTMP. These pulps have relatively coarse fibres with remaining lignin, and therefore they have relatively large pore volume, high wet resilience and low liquid dispersability. High wet resilience means that the fluff pulp essentially retains its structure even after wetting. Other fluff pulps with similar properties can be used, for example Southern Pine or chemically stiffened cellulose fibres, as well as synthetic fibres.

According to the examples shown in Figs. 3 - 5, there is arranged on top of the storage layer 12 a cover layer 11, which together with the well 13 forms the liquid acquisition portion of the absorbent body. The cover layer 11 and the well 13 can, as shown, be integrated with each other and thus consist of the same material. They can, however, also consist of different materials, both of which should, however, have the desired properties, such as relatively large pore size, high wet resilience and low liquid dispersability. The cover layer increases the surface dryness of the absorbent body.

The cover layer 11 has, in the embodiment shown in Fig. 3, a thicker rear portion 11a, as seen in the position of use of the absorbent body, said thicker portion changing, at a certain distance from the well 13, preferably 5-50 mm, to a thinner portion 11b. The thinner por-

tion 11b has a higher density than the thicker portion 11a and therefore functions as a liquid barrier preventing liquid from being spread towards the rear portion 11a of the cover layer 11, which is thus kept dry. An additional advantage is that urine and faeces are kept separate from each other. Mixing of urine and faeces results in the formation of undesirable decomposition products, which can cause skin irritation. The well 13 can, of course, also be completely surrounded by such a barrier 11b of the cover layer 11. The higher density of the portion 11b is automatically obtained by compression of the absorbent body, thanks to the reversed thickness ratio of the underlying storage layer 12, presupposing that it has a higher resistance to compression than the cover layer 11. A compressed barrier strip 11b next to the well 13 can of course be achieved in other manners.

The example shown in Fig. 4 lacks the wicking layer 14.

According to the example shown in Fig. 5, there is between the well 13 and the wicking layer 14 a liquid acquisition layer 19. This should consist of a material with a high liquid receptability and wet resilience, i.e. it should retain an open fibre structure even in a wet state. Examples of suitable materials are synthetic fibre material, e.g. in the form of a bat, polymer form material, cellulose fibres of mechanical pulp, thermo-mechanical pulp, chemi-thermo-mechanical pulp (so-called CTMP) or chemically stiffened cellulose fibres. The layer 19 can also consist of a material which swells upon wetting, e.g. compressed dry formed sheet pulp.

The fibre material in the storage layer 12 should substantially consist of fluff pulp or other fibre material with relatively small pore volume and high liquid dispersability. Fluff pulps made chemically, which consist of fine fibres of essentially pure cellulose, have in general good liquid dispersability. Even fluff pulp of, for example, CTMP compressed to a density of over about 0.12 g/cm^3 has relatively good liquid dispersion properties.

Another material with good liquid dispersion properties is compressed dry-formed sheet pulp of for example CTMP or chemical pulp. Such materials are described in WO 90/05808.

The fibre material in the wicking layer 14 should consist substantially of chemical fluff pulp, dry-formed sheet pulp according to the above or other fibre material with good dispersion properties.

The density in the liquid acquisition portion 11, 13 should be between 0.02 and 0.2 g/cm^3 , and preferably between 0.06 and 0.15 g/cm^3 . The density in the storage layer 12 should be between 0.1 and 1.0 g/cm^3 , preferably between 0.12 and 0.6 g/cm^3 . The density in the wicking layer 14 should be 0.08 - 1.0 g/cm^3 , and preferably 0.12 - 0.6 g/cm^3 . The density values given above apply for absorbent bodies of cellulose fluff pulp. For other types of absorbent materials, other densities can be suitable.

The difference in pore size between the liquid acquisition portion 11, 13, on one hand, and the storage layer 12 and the wicking layer 14, on the other hand, can be achieved by a difference in density between the layers, but even at the same density, but with different types of fibre materials, the desired pore size difference can be achieved.

The liquid acquisition portion 11, 13 contains between 0 and 30%, preferably between 2 and 15% of superabsorbent, computed on the total dry weight of the portion. The superabsorbent, in the form of flakes, fibres, granules, powder or the like, is preferably mixed with the fibre material, either substantially evenly distributed or in such a manner that certain portions can contain a higher proportion of superabsorbent than others. Its purpose is to absorb and bind any liquid which remains in the liquid acquisition portion 11, 13, even after it has been drained by the storage layer 13 and the wicking layer 14. This provides a dry surface closest to the user, since the spaces between the fibres in the liquid acquisition portion 11, 13 are essentially emptied of liquid.

The superabsorbent in the liquid acquisition portion 11, 13 should have a high gel strength, so that an open fibre structure is retained in this portion even after wetting, and it is an advantage if it has a relatively low absorption rate. The liquid acquisition portion 11, 13 can of course be completely free of superabsorbents.

The storage layer, as well, preferably contains superabsorbent, between 2 and 80%, preferably between 10 and 50%, computed on the total dry weight of the layer. The superabsorbent in the form of flakes, fibres, granules, powder or the like is either mixed with the fibre material or applied in the form of one or more layers between the layers of fibres. The superabsorbent is either evenly distributed in the storage layer 12 or with varying concentration across the length and/or thickness of the absorbent body.

It is also conceivable to have as a storage layer 12 an essentially pure layer of superabsorbent.

The superabsorbent in the storage layer 12 has preferably a high absorption capacity under pressure, i.e. a capacity to swell essentially unaffected by normally occurring compressive forces, in order to not block or impede the dispersion of liquid. What characterizes these superabsorbents is a high degree of cross-linking, which makes them more difficult to press together in comparison with a gel with a lower degree of cross-linking.

The storage layer 12 can, of course, also be completely free of superabsorbent.

The wicking layer 14 is preferably free of or contains very small amounts of superabsorbent.

The exuded body liquid, in this case urine, can be rapidly absorbed by the liquid acquisition portion 11, 13, and be spread either directly or via the wicking layer 14 onto the second absorption layer 12, where it is stored. The difference in capillary size between the fibre

0.02 0.2
0.1 1.0
0.08 1.0
0.02 2.2

materials in the liquid acquisition portion 11, 13 and the storage layer 12 creates a suction directed from the liquid acquisition portion 11, 13 towards the storage layer 12 or the wicking layer 14.

The liquid acquisition portion 11, 13 is drained of liquid and is prepared to receive the next dose of liquid. The storage layer 12 has a capacity for storing several doses of liquid.

The well 13 can have varying shape and size. It is important, however, that it has a portion which is located in the assumed wetting area of the absorbent body, i.e. is displaced toward the front portion thereof. The well 13 can extend transversely to the absorbent body out to the longitudinal lateral edges 15, 16, as is shown in Fig. 6, or terminate inside them, as is shown in Fig. 2. In both of the examples, the well 13 is located only in the front portion of the absorbent body and terminates slightly inside its front edge 17. It is, however, conceivable that the well 13 extend up to the front edge and that it even extend somewhat into the rear portion of the absorbent body, possibly to its rear edge 18.

According to an additional variant, the absorbent body has two or more wells. Such an embodiment is shown in Figs. 8 and 9. An advantage of having several small wells 13 instead of one big well is that the wetting area of a diaper may vary depending on whether the user is lying or sitting and it also varies between males and females. With more than one well, the risk that the urine will strike the absorbent body outside the well is reduced. A small well is also more rapidly drained from liquid than a big well, which is a further advantage. The wells may also have different sizes in different areas of the absorbent body.

The absorbent materials described above have only fibre based structures. It is, however, possible according to the invention, to use other types of porous absorbent materials, such as polymer foams, for example polyester, polyurethane, polyolefines, viscose, etc., or porous polymeric macro structures. The desired pore size difference between the liquid acquisition portion and the storage portion can be achieved simply with such materials as well. Even combinations of fibre and foam materials can be used.

By pore size is meant here the effective mean pore size which the structure has in dry state. A measuring method for determining and measuring the effective mean pore size in a fibre structure is described in EP-A-0,470,392. An alternative embodiment involves the use as a liquid acquisition portion, especially as a well 13, a hard compressed material, which expands when wetted. Repeated wettings will thus give it an expanded and increased pore volume. Examples of such materials are compressed dry formed sheet pulp, compressed structures of chemically stiffened cellulose fibres and compressed thermal bound fibre structures, where wetting breaks the thermal bonds and the structure is allowed to expand.

A few comparative tests are described below com-

paring an absorbent body according to the invention with an absorbent body without a well 13.

Examples

The instantaneous absorption and rewetting were tested for two fluff pulp bodies A and B 10 x 28 cm, each consisting of an upper layer of CTMP pulp of soft wood, a storage layer located thereunder of chemical pulp of soft wood and thereunder a dispersion layer of chemical pulp of soft wood. The upper layer of the sample body A contained 1.2 g of superabsorbent, essentially homogeneously mixed with the fluff pulp fibres, while the upper layer of the sample body B contained 0.8 g of the same superabsorbent, essentially homogeneously mixed. The weight per unit area of the upper layer in the sample body A was 400 g/m². The weight per unit area in the upper layer in the sample body B was 200 g/m². The sample body B had a well of the same material and density as the upper layer. The well had a cross-sectional area in the form of a circle with the diameter 9 cm. The mean density of the sample body B in the well area was 0.07 g/cm³, while the mean density outside the well area was 0.11 g/cm³.

The storage layer in the sample body A had a weight per unit area of 600 g/m² and a density of 0.125 g/cm³. Immediately thereunder, i.e. between the storage layer and the wicking layer, there was supplied a layer of 4.5 g of superabsorbent. The weight per unit area of the wicking layer was 300 g/m². The mean density of the sample body A was 0.2 g/cm³.

The storage layer in the sample body B had a weight per unit area of 500 g/m², a density of 0.125 g/cm³ and contained 4.6 g of the same superabsorbent as the sample body A, essentially homogeneously mixed into the fluff pulp. The wicking layer in the sample body B had a weight per unit area of 250 g/m².

Instantaneous absorption

Four additions of each 60 ml of liquid (0.9% NaCl solution) were made at a certain time interval. The time it took until all the liquid was absorbed was measured (visual observation). The result is shown in Fig. 10 in the form of a bar graph. The sample body B had a substantially better instantaneous absorption than the sample body A, especially at the second, third and fourth wetting. The sample body B retained its rapid instantaneous absorption during the repeated wettings.

Rewetting

The rewetting was measured just before the fourth liquid addition by a filter paper being placed over the wetting point and being loaded with a weight of 1.1 kg (2.8 kPa) for 15 seconds. The filter papers were weighed before and after the loading and the rewetting was noted. The sample body A had a rewetting of 3.5 g

and the sample body B had a rewetting of 2.3 g, i.e. there was a lower degree of rewetting for sample body B.

In conclusion, the tests show a significantly improved instantaneous absorption, especially upon repeated wetting, for the sample body containing the liquid acquisition well according to the invention. Furthermore, it had a lower rewetting. Thus, the invention has achieved an absorbent body with very good absorption properties.

Claims

1. Absorbent body in an absorbent product, such as a diaper, incontinence pad, sanitary napkin or the like, said absorbent body comprising a liquid acquisition portion (11, 13) and a liquid storage portion (12) adjacent thereto, a first absorbent structure, which has a first effective mean pore size, being arranged in the liquid storage portion (12), and one or more second absorbent structures, each one having a larger effective mean pore size than the first mean pore size, being arranged in the liquid acquisition portion (11, 13), characterized in that said liquid acquisition portion comprises at least one well (13) located at the assumed wetting area of the absorbent body, said well extending depthwise into the underlying liquid storage portion (12), as well as a cover layer (11) which covers at least substantial portions of the liquid storage portion (12), said one or more second absorbent structures being arranged in said well(s) (13) and said cover layer (11).
2. Absorbent body according to Claim 1, characterized in that the cover layer (11) of the liquid acquisition portion and the well (13) are integrated with each other and consist of the same type of material.
3. Absorbent body according to Claim 1, characterized in that the cover layer (11) of the liquid acquisition portion and its well (13) consist of different types of material.
4. Absorbent body according to one or more of the preceding Claims, characterized in that the first and/or the second absorbent structure comprise(s) hydrophilic fibre material.
5. Absorbent body according to one or more of the preceding Claims, characterized in that the first and/or the second absorbent structure comprise(s) polymer foam material.
6. Absorbent body according to Claim 4 or 5, characterized in that the liquid acquisition portion (11, 13) has a lower density than the liquid storage portion (12).
7. Absorbent body according to Claim 4, characterized in that the liquid acquisition portion (11, 13) has a density of 0.02-0.2 g/cm³, preferably 0.06-0.15 g/cm³, and the liquid storage portion (12) has a density of 0.1-1.0 g/cm³, preferably 0.12-0.6 g/cm³.
8. Absorbent body according to Claims 4, 6 or 7, characterized in that the fibre material in the liquid acquisition portion (11, 13) has an open fibre structure and a low liquid dispersability, and that the fibre material in the liquid storage portion (12) has a higher liquid dispersability than the fibre material in the liquid acquisition portion (11, 13).
9. Absorbent body according to Claim 8, characterized in that the major portion of the fibre material in the liquid acquisition portion (11, 13) consists of mechanical pulp, thermo-mechanical pulp, chemi-thermo-mechanical pulp, pulp of chemically stiffened cellulose fibres, synthetic fibres or mixtures thereof.
10. Absorbent body according to one or more of Claims 6-9, characterized in that the major portion of the fibre material in the liquid storage portion (12) consists of chemical pulp.
11. Absorbent body according to one or more of Claims 6-9, characterized in that the major portion of the fibre material in the liquid storage portion (12) consists of dry formed sheet pulp.
12. Absorbent body according to one or more of the preceding Claims, characterized in that the liquid acquisition portion (11, 13) contains between 0 and 30%, preferably between 2 and 15% superabsorbent material computed on the dry total weight of the portion.
13. Absorbent body according to one or more of the preceding Claims, characterized in that the liquid storage portion (12) contains between 2 and 80%, preferably between 10 and 50% superabsorbent material computed on the dry total weight of the portion.
14. Absorbent body according to Claim 1, characterized in that the liquid storage portion (12) consists of a layer of superabsorbent material in particle form.
15. Absorbent body according to one or more of the preceding claims, characterized in, that it comprises two or more wells (13) distributed over the assumed wetting area of the absorbent body.
16. Absorbent body according to one or more of the

- preceding Claims, characterized in that on the side of the liquid storage portion (12) which faces away from the liquid acquisition layer (11), there is arranged a liquid wicking layer (14) which is in liquid communication with the well (13). 5
17. Absorbent body according to Claim 16, characterized in that the well (13) of the liquid acquisition portion (11, 13) extends entirely through the liquid storage portion (12) and is in direct contact with the wicking layer (14). 10
18. Absorbent body according to Claim 16, characterized in that between the well (13) and the wicking layer (14) there is arranged a layer (19) of a material with high liquid absorption capacity and wet resilience, alternatively a capacity to swell in wet state, e.g. synthetic fibre material, polymer foam material, cellulose fibres of mechanical, thermo-mechanical or chemi-thermo-mechanical pulp, pulp of chemically stiffened cellulose fibres or dry formed compressed sheet pulp. 15 20
19. Absorbent body according to one or more of the preceding Claims, characterized in that the cover layer (11) has a portion (11b) adjacent to the well (13), said portion having a higher density than the adjacent portions of the cover layer (11a). 25
20. Absorbent body according to Claim 19, characterized in that the rear portion (11a) of the cover layer (11), as seen in the use position of the absorbent body, has a lower density than said more compressed portion (11b), and that said rear portion (11a) is separated from the well by means of a margin of said more compressed portion (11b). 30 35
21. Absorbent body according to Claim 20, characterized in that said margin (11b) extends in the longitudinal direction of the absorbent body between 5 and 50 mm. 40
22. Absorbent product such as a diaper, incontinence protector, sanitary napkin or the like, comprising an absorbent body according to one or more of Claims 1-19 enclosed between a liquid permeable cover layer (1) and a liquid impermeable cover layer (2). 45
- Patentansprüche**
1. Absorbierender Körper in einem absorbierenden Produkt, wie z.B. einer Windel, einem Inkontinenzpolster, einer Binde oder dergleichen, wobei der absorbierende Körper einen Flüssigkeitserfassungsabschnitt (11, 13) und einen daran angrenzenden Flüssigkeitsspeicherabschnitt (12) umfaßt, wobei eine erste absorbierende Struktur, die eine erste effektive mittlere Porengröße aufweist, in dem Flüssigkeitsspeicherabschnitt (12) angeordnet ist, und eine oder mehr zweite absorbierende Strukturen, wobei jede eine größere effektive mittlere Porengröße als die erste mittlere Porengröße aufweist, in dem Flüssigkeitserfassungsabschnitt (11, 13) angeordnet sind, dadurch gekennzeichnet, daß der Flüssigkeitserfassungsabschnitt zumindest einen Schacht (13) umfaßt, der in dem angenommenen Naßbereich des absorbierenden Körpers gelegen ist, wobei sich der Schacht in der Tiefenrichtung in den darunterliegenden Flüssigkeitsspeicherabschnitt (12) erstreckt, wie auch eine Deckschicht (11), die zumindest wesentliche Abschnitte des Flüssigkeitsspeicherabschnitts (12) bedeckt, wobei die eine oder mehr zweiten absorbierenden Strukturen in dem Schacht bzw. in den Schächten (13) und der Deckschicht (11) angeordnet sind.
2. Absorbierender Körper nach Anspruch 1, dadurch gekennzeichnet, daß die Deckschicht (11) des Flüssigkeitserfassungsabschnitts und der Schacht (13) ineinander integriert sind und aus der gleichen Materialart bestehen.
3. Absorbierender Körper nach Anspruch 1, dadurch gekennzeichnet, daß die Deckschicht (11) des Flüssigkeitserfassungsabschnitts und dessen Schacht (13) aus verschiedenen Materialarten bestehen.
4. Absorbierender Körper nach einem oder mehreren der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die erste und/oder die zweite absorbierende Struktur hydrophiles Fasermaterial umfaßt/umfassen.
5. Absorbierender Körper nach einem oder mehreren der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die erste und/oder die zweite absorbierende Struktur Polymerschaummaterial umfaßt/umfassen.
6. Absorbierender Körper nach Anspruch 4 oder 5, dadurch gekennzeichnet, daß der Flüssigkeitserfassungsabschnitt (11, 13) eine geringere Dichte als der Flüssigkeitsspeicherabschnitt (12) aufweist.
7. Absorbierender Körper nach Anspruch 4, dadurch gekennzeichnet, daß der Flüssigkeitserfassungsabschnitt (11, 13) eine Dichte von $0,02 - 0,2 \text{ g/cm}^3$, vorzugsweise $0,06 - 0,15 \text{ g/cm}^3$, aufweist und der Flüssigkeitsspeicherabschnitt (12) eine Dichte von $0,1 - 1,0 \text{ g/cm}^3$, vorzugsweise $0,12 - 0,6 \text{ g/cm}^3$, aufweist.
8. Absorbierender Körper nach den Ansprüchen 4, 6 oder 7, dadurch gekennzeichnet, daß das Faser-

- material in dem Flüssigkeitserfassungsabschnitt (11, 13) eine offene Faserstruktur und ein geringes Flüssigkeitsdispersionsvermögen aufweist, und daß das Fasermaterial in dem Flüssigkeitsspeicherabschnitt (12) ein höheres Flüssigkeitsdispersionsvermögen als das Fasermaterial in dem Flüssigkeitserfassungsabschnitt (11, 13) aufweist.
9. Absorbierender Körper nach Anspruch 8, **dadurch gekennzeichnet**, daß der Hauptabschnitt des Fasermaterials in dem Flüssigkeitserfassungsabschnitt (11, 13) aus mechanischer Pulpe, chemisch-thermo-mechanischer Pulpe, Pulpe aus chemisch verstärkten Zellulosefasern, Kunststoffasern oder Mischungen daraus besteht.
10. Absorbierender Körper nach einem oder mehreren der Ansprüche 6 bis 9, **dadurch gekennzeichnet**, daß der Hauptabschnitt des Fasermaterials in dem Flüssigkeitsspeicherabschnitt (12) aus chemischer Pulpe besteht.
11. Absorbierender Körper nach einem oder mehreren der Ansprüche 6 bis 9, **dadurch gekennzeichnet**, daß der Hauptabschnitt des Fasermaterials in dem Flüssigkeitsspeicherabschnitt (12) aus trockengeformter Blattpulpe besteht.
12. Absorbierender Körper nach einem oder mehreren der vorhergehenden Ansprüche, **dadurch gekennzeichnet**, daß der Flüssigkeitserfassungsabschnitt (11, 13) zwischen 0 und 30 %, vorzugsweise zwischen 2 und 15 % superabsorbierendes Material enthält, berechnet anhand des trockenen Gesamtgewichts des Abschnitts.
13. Absorbierender Körper nach einem oder mehreren der vorhergehenden Ansprüche, **dadurch gekennzeichnet**, daß der Flüssigkeitsspeicherabschnitt (12) zwischen 2 und 80 %, vorzugsweise zwischen 10 und 50 % superabsorbierendes Material enthält, berechnet anhand des trockenen Gesamtgewichts des Abschnitts.
14. Absorbierender Körper nach Anspruch 1, **dadurch gekennzeichnet**, daß der Flüssigkeitsspeicherabschnitt (12) aus einer Schicht aus superabsorbierendem Material in Partikelform besteht.
15. Absorbierender Körper nach einem oder mehreren der vorhergehenden Ansprüche, **dadurch gekennzeichnet**, daß dieser zwei oder mehr Schächte (13) umfaßt, die über den angenommenen Naßbereich des absorbierenden Körpers verteilt sind.
16. Absorbierender Körper nach einem oder mehreren der vorhergehenden Ansprüche, **dadurch gekennzeichnet**, daß an der Seite des Flüssigkeitsspeicherabschnitts (12), die von der Flüssigkeitserfassungsschicht (11) weggekehrt ist, eine Flüssigkeitsdochtschicht (14) angeordnet ist, die in flüssiger Verbindung mit dem Schacht (13) steht.
17. Absorbierender Körper nach Anspruch 16, **dadurch gekennzeichnet**, daß sich der Schacht (13) des Flüssigkeitserfassungsabschnitts (11, 13) völlig durch den Flüssigkeitsspeicherabschnitt (12) erstreckt und direkt die Dochtschicht (14) berührt.
18. Absorbierender Körper nach Anspruch 16, **dadurch gekennzeichnet**, daß zwischen dem Schacht (13) und der Dochtschicht (14) eine Schicht (19) aus einem Material mit einer hohen Flüssigkeitsabsorptionskapazität und Naß-Spannkraft angeordnet ist, alternativ mit einer Kapazität, um im nassen Zustand anzuschwellen, z.B. Kunststoffasermaterial, Polymerschaummaterial, Zellulosefasern aus mechanischer, thermo-mechanischer oder chemisch-thermo-mechanischer Pulpe, Pulpe aus chemisch verstärkten Zellulosefasern oder trockengeformte zusammengedrückte Blattpulpe.
19. Absorbierender Körper nach einem oder mehreren der vorhergehenden Ansprüche, **dadurch gekennzeichnet**, daß die Deckschicht (11) einen an den Schacht (13) angrenzenden Abschnitt (11b) aufweist, wobei der Abschnitt eine höhere Dichte als die angrenzenden Abschnitte der Deckschicht (11a) aufweist.
20. Absorbierender Körper nach Anspruch 19, **dadurch gekennzeichnet**, daß der hintere Abschnitt (11a) der Deckschicht (11), bei Betrachtung in der Verwendungsposition des absorbierenden Körpers, eine niedrigere Dichte als der mehr zusammengedrückte Abschnitt (11b) aufweist, und daß der hintere Abschnitt (11a) von dem Schacht durch einen Rand des mehr zusammengedrückten Abschnitts (11b) getrennt ist.
21. Absorbierender Körper nach Anspruch 20, **dadurch gekennzeichnet**, daß sich der Rand (11b) in der Längsrichtung des absorbierenden Körpers zwischen 5 und 50 mm erstreckt.
22. Absorbierendes Produkt, wie z.B. eine Windel, ein Inkontinenzpolster, eine Binde oder dergleichen, umfassend einen absorbierenden Körper nach einem oder mehreren der Ansprüche 1 bis 19, der zwischen einer flüssigkeitsdurchlässigen Deckschicht (1) und einer flüssigkeitsundurchlässigen Deckschicht (2) eingeschlossen ist.

Revendications

1. Corps absorbant dans un produit absorbant comme une couche-culotte, une protection anti-incontinence, une serviette hygiénique ou autre, ledit corps absorbant comprenant une partie (11, 13) de réception du liquide et une partie (12) de stockage du liquide adjacente à celle-ci, une première structure absorbante qui a une première taille moyenne utile de pores étant disposée dans la partie (12) de stockage du liquide et une ou plusieurs deuxième(s) structure(s) absorbante(s), qui ont toutes une taille moyenne utile de pores plus grande que la première taille moyenne utile de pores, étant disposée(s) dans la partie (11, 13) de réception du liquide, caractérisé en ce que ladite partie de réception du liquide comprend au moins un puits (13) placé au niveau de la région de mouillure présumée du corps absorbant, ledit puits s'étendant dans le sens de la profondeur dans la partie (12) de stockage du liquide située en-dessous, ainsi qu'une couche de couverture (11) qui recouvre des régions importantes au moins de la partie (12) de stockage du liquide, ladite ou lesdites deuxième(s) structure(s) absorbante(s) étant disposée(s) dans ledit ou lesdits puits (13) et ladite couche de couverture (11).
2. Corps absorbant selon la revendication 1, caractérisé en ce que la couche de couverture (11) de la partie de réception du liquide et le puits (13) sont intégrées l'une à l'autre et sont faites du même matériau.
3. Corps absorbant selon la revendication 1, caractérisé en ce que la couche de couverture (11) de la partie de réception du liquide et son puits (13) sont faites de différents types de matériaux.
4. Corps absorbant selon une ou plusieurs des revendications précédentes, caractérisé en ce que la première et/ou la deuxième structure absorbante est faite d'un matériau fibreux hydrophile.
5. Corps absorbant selon une ou plusieurs des revendications précédentes, caractérisé en ce que la première et/ou la deuxième structure absorbante est faite d'un matériau en mousse polymère.
6. Corps absorbant selon la revendication 4 ou 5, caractérisé en ce que la partie (11, 13) de réception du liquide a une densité plus faible que la partie (12) de stockage du liquide.
7. Corps absorbant selon la revendication 4, caractérisé en ce que la partie (11, 13) de réception du liquide a une densité de 0,02 à 0,2 g/cm³, et de préférence de 0,06 à 0,15 g/cm³, et la partie (12) de stockage du liquide a une densité de 0,1 à 1,0 g/cm³, et de préférence de 0,12 à 0,6 g/cm³.
8. Corps absorbant selon la revendication 4, 6 ou 7, caractérisé en ce que le matériau fibreux de la partie (11, 13) de réception du liquide a une structure ouverte de fibres et une faible capacité de dispersion du liquide, et en ce que le matériau fibreux de la partie (12) de stockage du liquide a une plus grande capacité de dispersion du liquide que le matériau fibreux de la partie (11, 13) de réception du liquide.
9. Corps absorbant selon la revendication 8, caractérisé en ce que la plus grande partie du matériau fibreux de la partie (11, 13) de réception du liquide est faite de pulpe mécanique, de pulpe thermomécanique, de pulpe chimiothermomécanique, de pulpe de fibres de cellulose rigidifiées chimiquement, de fibres de synthèse ou de mélanges de celles-ci.
10. Corps absorbant selon une ou plusieurs des revendications 6 à 9, caractérisé en ce que la plus grande partie du matériau fibreux de la partie (12) de stockage du liquide est faite de pulpe chimique.
11. Corps absorbant selon une ou plusieurs des revendications 6 à 9, caractérisé en ce que la plus grande partie du matériau fibreux de la partie (12) de stockage du liquide est faite de pulpe en feuille formée à sec.
12. Corps absorbant selon une ou plusieurs des revendications précédentes, caractérisé en ce que la partie (11, 13) de réception du liquide contient entre 0 et 30%, et de préférence entre 2 et 15%, de matériau superabsorbant, ces valeurs étant calculées par rapport au poids total à sec de ladite partie.
13. Corps absorbant selon une ou plusieurs des revendications précédentes, caractérisé en ce que la partie (12) de stockage du liquide contient entre 2 et 80%, et de préférence entre 10 et 50%, de matériau superabsorbant, ces valeurs étant calculées par rapport au poids total à sec de ladite partie.
14. Corps absorbant selon la revendication 1, caractérisé en ce que la partie (12) de stockage du liquide consiste en une couche de matériau superabsorbant sous forme particulière.
15. Corps absorbant selon une ou plusieurs des revendications précédentes, caractérisé en ce qu'il comprend deux puits (13) ou plus, réparties sur la région de mouillure présumée du corps absorbant.
16. Corps absorbant selon une ou plusieurs des reven-

dications précédentes, caractérisé en ce que, sur la face de la partie (12) de stockage du liquide qui est tournée à l'opposé de la couche (11) de réception du liquide, est disposée une couche (14) formant mèche pour le liquide, qui est en communication de passage du liquide avec le puits (13).

17. Corps absorbant selon la revendication 16, caractérisé en ce que le puits (13) de la partie (11, 13) de réception du liquide traverse toute la partie (12) de stockage du liquide et est en contact direct avec la couche (14) formant mèche. 5
18. Corps absorbant selon la revendication 16, caractérisé en ce que, entre le puits (13) et la couche (14) formant mèche, est disposée une couche (19) de matériau à forte capacité d'absorption des liquides et de grande élasticité à l'état humide, ou alors qui a la capacité de gonfler quand il est humide, comme un matériau en fibres de synthèse, un matériau en mousse de polymère, des fibres de cellulose de pulpe mécanique, thermomécanique ou chimiothermomécanique, de la pulpe de fibres de cellulose rigidifiées chimiquement ou de la pulpe en feuille comprimée, formée à sec. 10 15 20 25
19. Corps absorbant selon une ou plusieurs des revendications précédentes, caractérisé en ce que la couche de couverture (11) comprend une partie (11b) adjacente au puits (13), ladite partie ayant une densité plus grande que les parties adjacentes (11a) de la couche de couverture. 30
20. Corps absorbant selon la revendication 19, caractérisé en ce que la partie arrière (11a) de la couche de couverture (11), quand on regarde dans la position d'utilisation du corps absorbant, a une densité plus faible que ladite partie plus comprimée (11b), et en ce que ladite partie arrière (11a) est séparée du puits par une bordure de ladite partie plus comprimée (11b). 35 40
21. Corps absorbant selon la revendication 20, caractérisé en ce que ladite bordure (11b) s'étend dans la direction longitudinale du corps absorbant sur une distance comprise entre 5 et 50 mm. 45
22. Produit absorbant comme une couche-culotte, une protection anti-incontinence, une serviette hygiénique ou autre, comprenant un corps absorbant selon une ou plusieurs des revendications 1 à 19, enfermé entre une couche d'enveloppe (1) perméable au liquide et une couche d'enveloppe (2) imperméable au liquide. 50 55

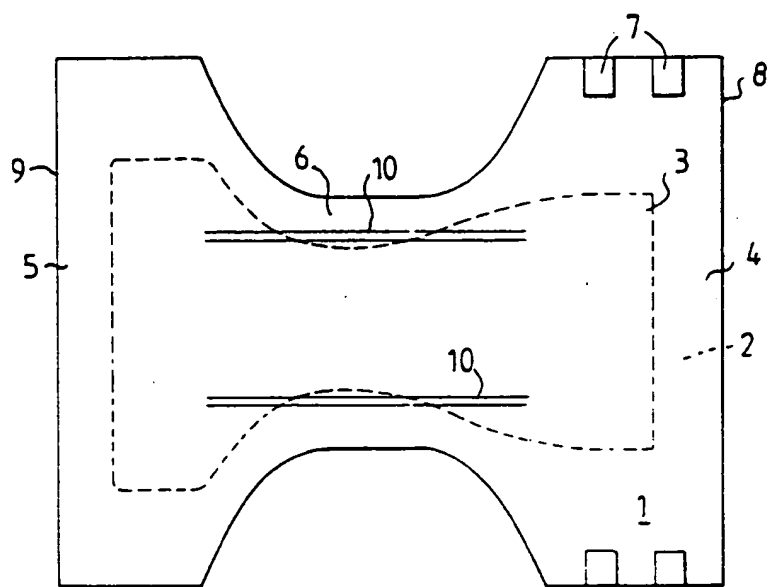


FIG. 1

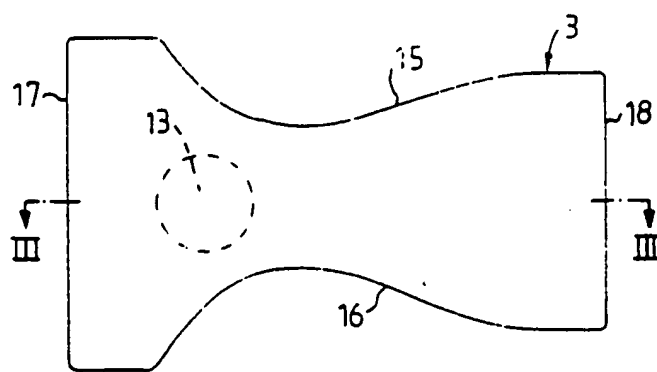


FIG. 2

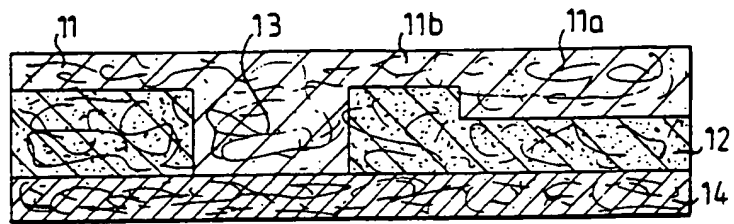


FIG. 3

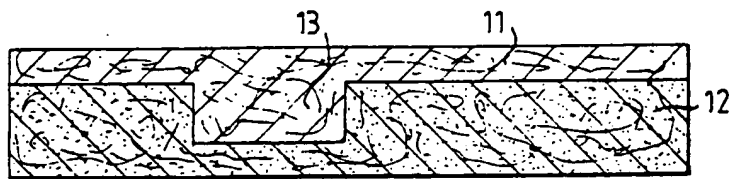


FIG. 4

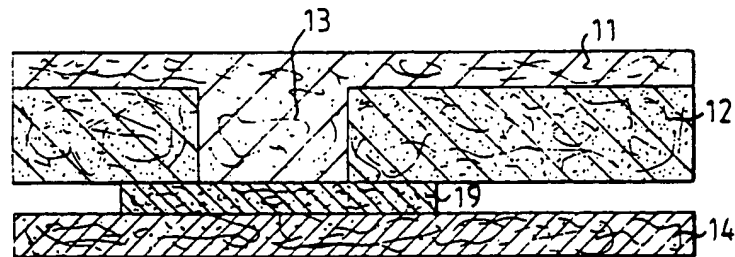


FIG. 5

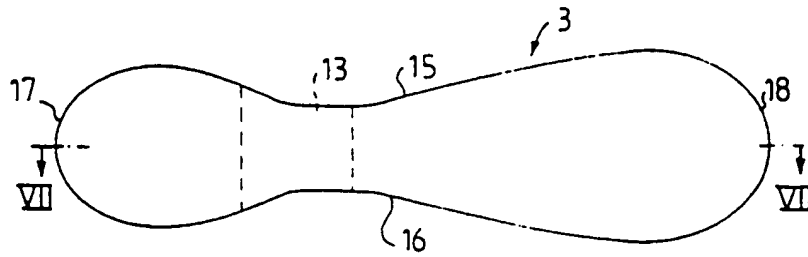


FIG. 6

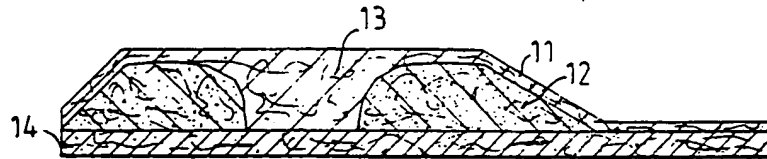


FIG. 7

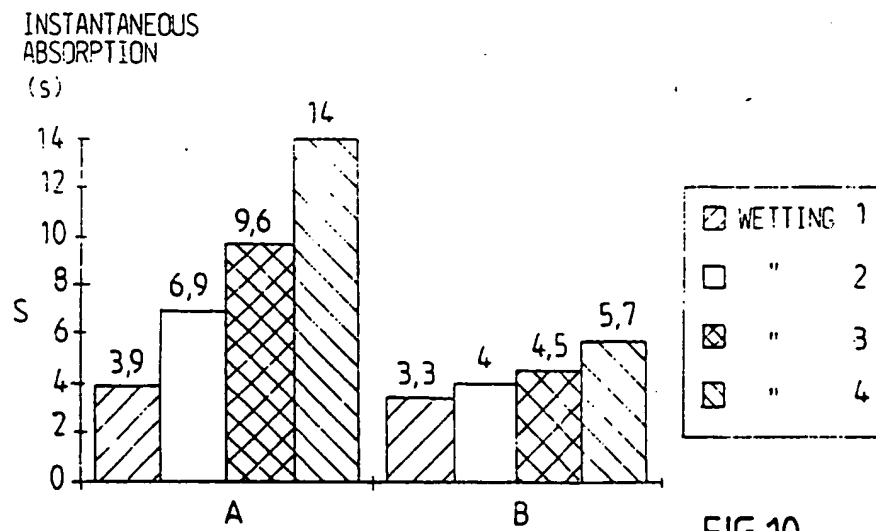


FIG. 10

